


Ideal for schools, dormitories, apartments, condominiums and office buildings, Wausau HX32-XLT Series single-hung tilt-sash windows offer AAMA Architectural Class durability and a design pressure rating suitable for mid-rise construction, as well as outstanding thermal performance.

Features

- 3-1/4" frame depth
- 18 mm, 22 mm and 38 mm XLT polyamide thermal barriers
- Can accommodate different interior and exterior finishes
- AAMA AW-50 Architectural Performance Class rating
- 0.060" to 0.080" extrusion wall thickness
- Tilt-in sash for custodial cleaning access
- Rigid, five-member frame construction for ease of installation and lower air infiltration
- Various latches available; block and tackle or Caldwell Ultralift™ balances
- Optional snap-in nailing flange/air-water membrane leg
- Between-glass muntins optional
- Half screens available, removable from the interior



Details

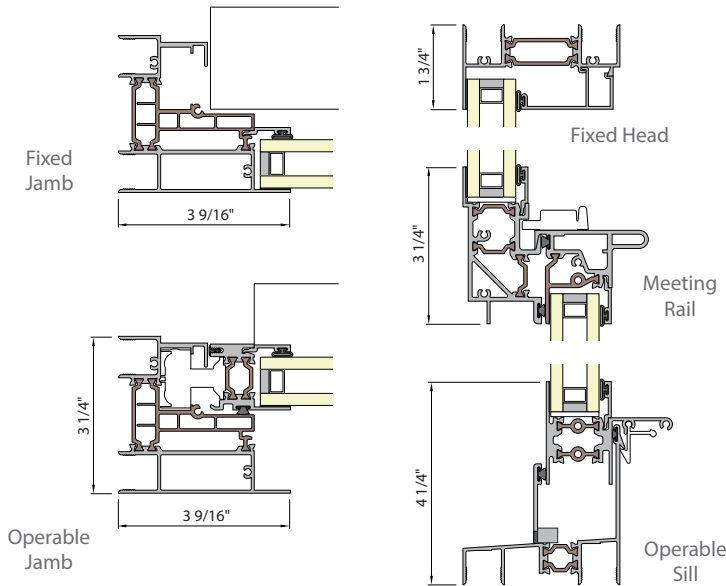

Wausau HX32-XLT Series Single-Hung Tilt-Sash Windows

Developed and tested as EFCO XTherm™ Series HX32



Allowable Air	Water	NFRC U-Factor	CRF _f	STC OITC
0.30 cfm/sqft at 6.24 psf	10 psf	0.38 to 0.53 BTU/hr.sqft.*F	69	33 to 37 27 to 33

Test results may vary



WAUSAU
WINDOW AND WALL
SYSTEMS



7800 International Drive, Wausau, WI 54401
1.877.678.2983
info@wausauwindow.com
wausauwindow.com

