


Ideal for schools, dormitories, apartments, condominiums and office buildings, Wausau SX45-XLT Series single-slide horizontal rolling windows offer AAMA Architectural Class durability and design pressure ratings suitable for high-rise construction, as well as outstanding thermal performance.

Features

- 4-1/2" frame depth
- 24 mm and 38 mm XLT polyamide thermal barriers
- Can accommodate different interior and exterior finishes
- AAMA AW-45 Architectural Performance Class or optional AW-80 rating
- Fixed, half-slide, end-slide or center-slide configurations
- 0.060" to 0.090" extrusion wall thickness
- Rigid, five-member frame construction for ease of installation and lower air infiltration
- Concealed plunger lock, flush mounted actuating handle, and ball bearing rollers on a raised track
- Optional frame cavity foam fillers and triple insulating glass
- Half screens available, removable from the interior



Details

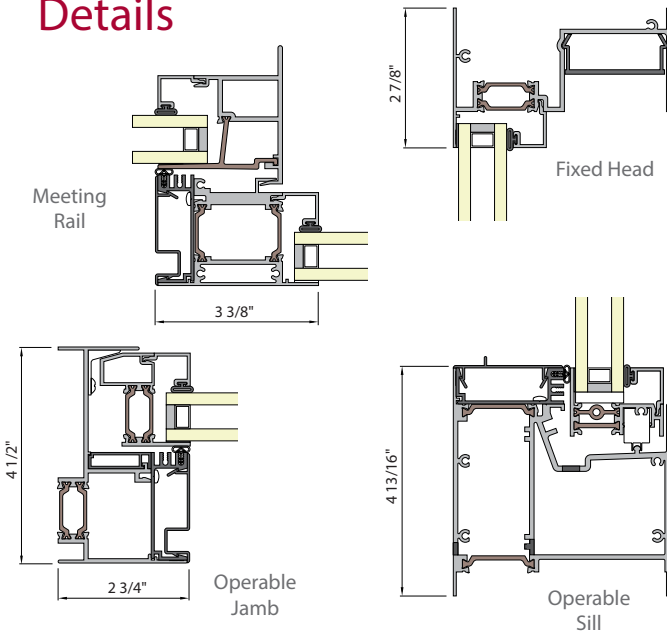

Wausau SX45-XLT Series Horizontal Rolling Windows

Developed and tested as EFCO XTherm™ Series SX45



Interior View

Allowable Air	Water	NFRC U-Factor	CRF _f	STC OITC
0.30 cfm/sqft at 6.24 psf	15 psf	0.31 to 0.53 BTU/hr.sqft.*F	69	33 to 37 27 to 33

Test results may vary



WAUSAU
WINDOW AND WALL
SYSTEMS



7800 International Drive, Wausau, WI 54401
1.877.678.2983
info@wausauwindow.com
wausauwindow.com

