


Architectural Windows

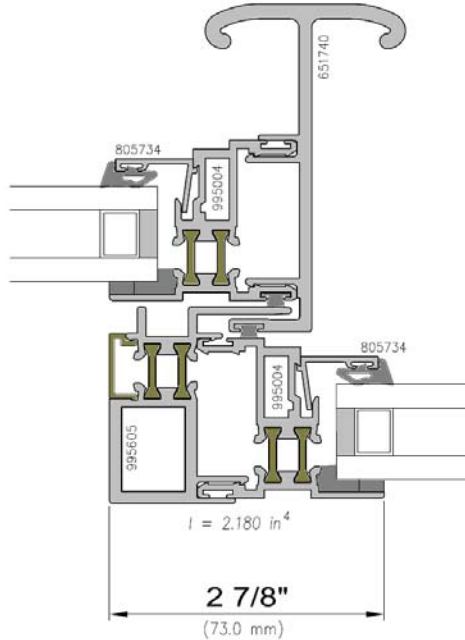

**Features**

- ✓ 4½” frame depth with polyamide thermal barrier
- ✓ AAMA AW45 and AW70 Performance Class
- ✓ “Slide-by” custodial operation for cleaning
- ✓ Accepts 1” insulating glass; bead glazed
- ✓ Sturdy corner-blocked and crimped sash construction
- ✓ Extruded aluminum or twist-in steel anchors
- ✓ Ball bearing Delrin® rollers
- ✓ Hinged or lift-off access doors optional
- ✓ 5/8” between-glass Venetian blinds available
- ✓ Head, sill and jamb receptors available
- ✓ Broad selection of renovation panning
- ✓ Offered through Advantage by Wausau
- ✓ NFRC Labeled
- ✓ Recycled aluminum framing available upon request

**Performance**

|                                |
|--------------------------------|
| <b>Allowable Air</b>           |
| 0.30<br>cfm/sqft at 6.24 psf   |
| <b>Water</b>                   |
| 12 psf                         |
| <b>NFRC U-Factor</b>           |
| 0.50 to 0.65<br>BTU/hr.sqft.°F |
| <b>CRF<sub>f</sub></b>         |
| 53                             |
| <b>STC</b>                     |
| 32 to 35<br>(est)              |



DISCLAIMER: Wausau Window and Wall Systems takes no responsibility for product selection or application, including, but not limited to, compliance with building codes, safety codes, laws, merchantability or fitness for a particular purpose; and further disclaims all liability for the use, in whole or in part, of this Technical Guide in preparation of project specifications and/or other documents. Technical Guides are subject to change at any time, without notice, and at Wausau's sole discretion. ©2014 Apogee Wausau Group, Inc.