


Setback glass provides a distinctive design feature

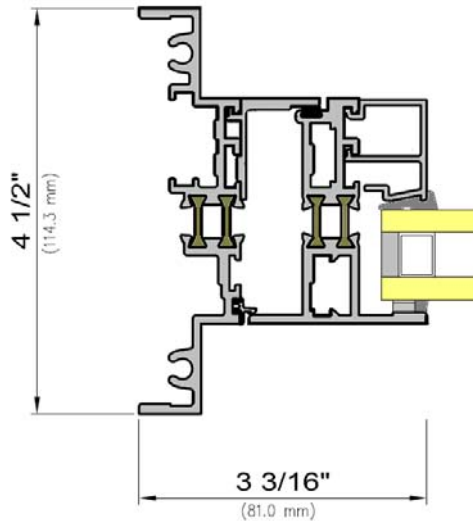

Features

- ✓ 4½" frame depth with polyamide thermal barrier
- ✓ AAMA AW-100 Performance Class
- ✓ Fixed, project-out awning, project-in hopper, or casement
- ✓ Glass plane recessed 1 ¼" from exterior face
- ✓ Dual or triple glazed option with hinged or lift-out access panels
- ✓ 5/8" or 1" between-glass Venetian blinds available
- ✓ Slide-in heavy duty steel anchors
- ✓ 1/8" principal wall thickness
- ✓ Multi-lock hardware option for improved accessibility
- ✓ Head, sill and jamb receptors available
- ✓ Broad selection of renovation panning
- ✓ Offered through Advantage by Wausau
- ✓ NFRC labeled
- ✓ High recycled content aluminum framing
- ✓ BHM option for UFC or ISC blast hazard mitigation

See the INvent™ –XLT
Technical Guide for superior
energy efficiency and
hurricane impact options.



Performance

Allowable Air	0.10 cfm/sqft at 6.24 psf
Water	15 psf
NFRC U-Factor	0.40 to 0.64 BTU/hr.sqft.°F (est.)
CRF_f	46 to 50 (est.)
STC	31 to 42

DISCLAIMER: Wausau Window and Wall Systems takes no responsibility for product selection or application, including, but not limited to, compliance with building codes, safety codes, laws, merchantability or fitness for a particular purpose; and further disclaims all liability for the use, in whole or in part, of this Technical Guide in preparation of project specifications and/or other documents. Technical Guides are subject to change at any time, without notice, and at Wausau's sole discretion. ©2014 Apogee Wausau Group, Inc.