

4250i-OS Offset INvent™ Series

(12)

Fixed

9

Project-in Casement

10

AAMA

Elevations Viewed From The Exterior



Details P19-2 thru P19-4 Posts and Stacks P19-5 thru P19-7

Glazing Options P19-8

Blind Options P19-9 and P19-10 Accessories P19-11 thru P19-13

AAMA Test Configurations (shown)

Architectural AW Class


For air, water, cycling and structural


Fixed Frame Size	60" x 99"	Fixed	1524 mm	x 2515 mm
Projected Frame Size	60" x 144"	Type D	1524 mm	x 3658 mm
Casement Frame Size	108" x 60"	Type D	2743 mm	x 1524 mm
Gateway Sizes	60" x 36"	Projected	1524 mm	x 914 mm
	36" x 60"	Casement	914 mm	x 1524 mm


NFRC 100 Thermal Test Configurations (shown)

For U-Factor, SHGC and CR

Fixed Frame Size 47" x 59" $_{1200 \text{ mm}}$ x $_{1500 \text{ mm}}$ x $_{1500 \text{ mm}}$ x $_{24}$ " x 59" $_{24}$ " x







Type D Unit 9

Type D Unit

4250i-OS Offset INvent

(12)

(11)

(12


5


6


(13


Project-out


Contact A Wausau Representative For Other Possible Configurations.








































Fixed / Fixed Post

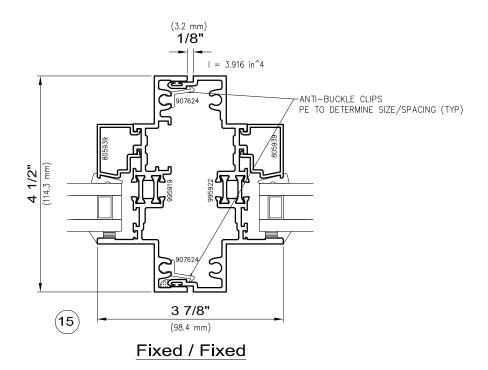


I-values indicated are for frame members only. Thermal barrier shear reduction of 10% included.

4250i-OS Offset INvent™ Series

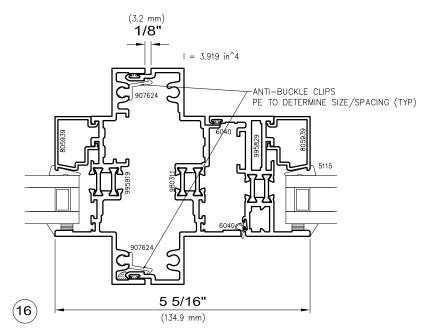


Fixed / Project-In




Fixed / Project-Out

I-values indicated are for frame members only. Thermal barrier shear reduction of 10% included.

4250i-OS Offset INvent™ Series

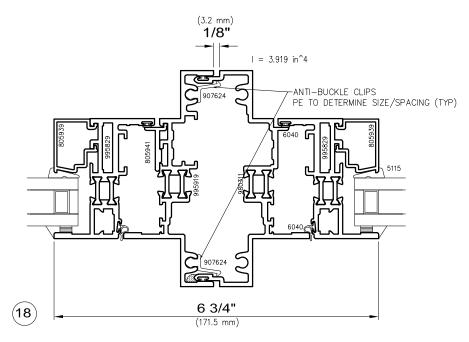

Project-In Vent / Project-In Vent

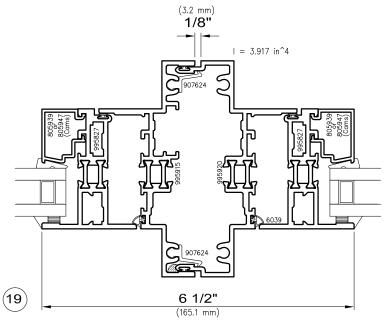

Project-Out Vent / Project-Out Vent


I-values indicated are for frame members only. Thermal barrier shear reduction of 10% included.



4250i-OS Offset INvent™ Series

6" to 8" Toe Bead at Each Corner


(152 mm - 203 mm)

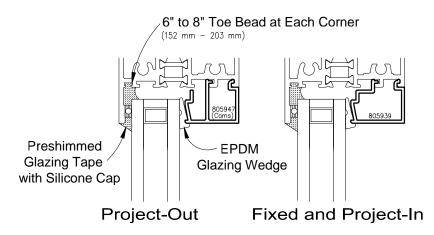


805949

1" Insulating Glass
Inside Glazed

1/4" Monolithic Glass
Inside Glazed

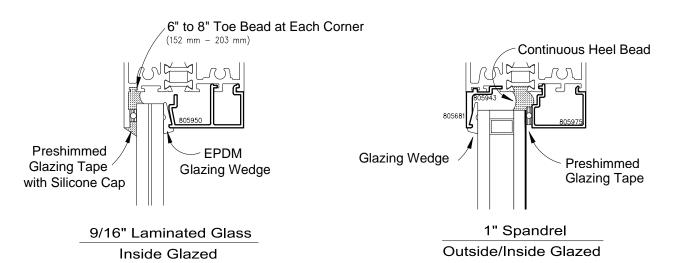





2" Panel Inside Glazed




4250i-OS Offset INvent™ Series


Elevations Shown As Viewed From The Interior

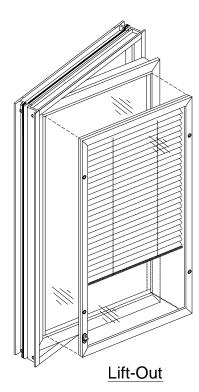



1" Blind/Dual Glazed

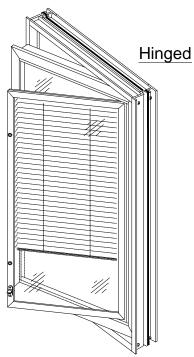




5/8" Blind/Dual Glazed





4250i-OS Offset INvent™ Series

Elevations Shown As Viewed From The Interior




5/8" Blind/Triple Glazed

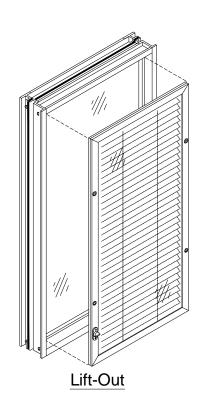

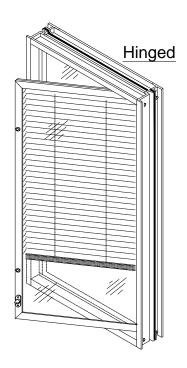




⚠ - OBSOLETE TOOLING STATUS

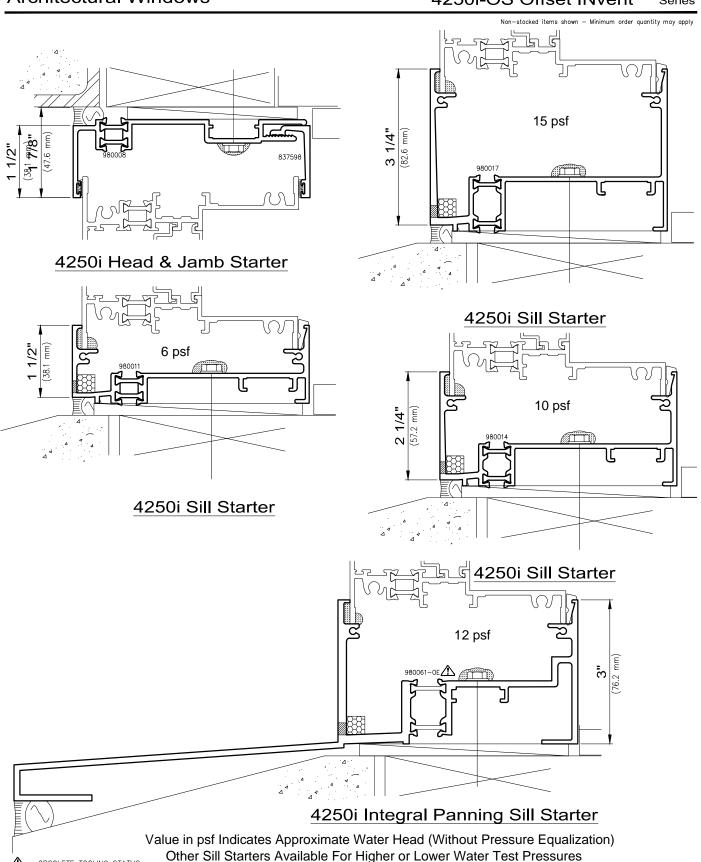


4250i-OS Offset INvent™ Series

Non-stocked items shown - Minimum order quantity may apply



4250i Heavy Duty Slide-In Anchor 3/16" (nom.) Formed Steel

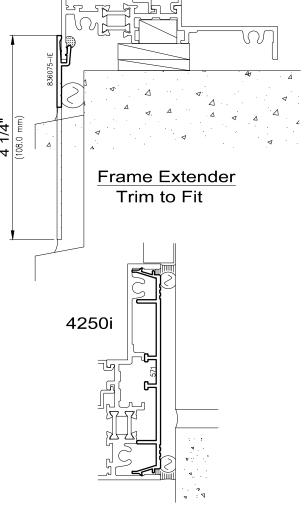

PVC Caulk Backers

4250i-OS Offset INvent™ Series

Non-stocked items shown — Minimum order quantity may apply

