


## Curtainwall

## 8000 and 8000i-BHM INvision™ Blast Hazard Mitigating Unitized

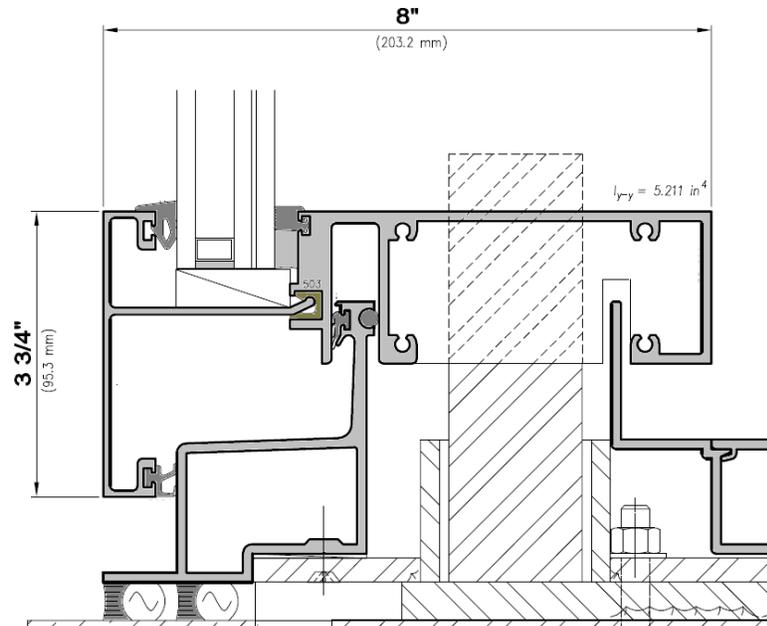

### Features

- ✓ Designed for compliance with GSA ISC Security Design Criteria and Department of Defense UFC 4-010-01 requirements
- ✓ Blast performance exceeding 10 psi peak pressure, 89 psi-msec impulse
- ✓ Accepts a variety of security glazing types
- ✓ Interlocking frame design accommodates seismic, live load and thermal building movements
- ✓ Pressure-equalized rain screen design
- ✓ Thermally improved (8000-BHM); polyamide thermal barrier optional (8000i-BHM)
- ✓ Structural silicone glazing and sealing in a controlled factory environment
- ✓ Accepts up to ¾" total vertical movement
- ✓ "Jack-bolt" anchor option for ease of installation
- ✓ Exterior sun shades and interior light shelves available
- ✓ High recycled content aluminum framing

### Performance

<b>Allowable Air</b>
0.06 cfm/sqft at 6.24 psf
<b>Water</b>
15 psf
<b>NFRC U-Factor</b>
0.51 to 0.73 BTU/hr.sqft.°F (est)
<b>CRF<sub>i</sub></b>
63 (est)
<b>STC</b>
31 to 37 (est)



DISCLAIMER: Wausau Window and Wall Systems takes no responsibility for product selection or application, including, but not limited to, compliance with building codes, safety codes, laws, merchantability or fitness for a particular purpose; and further disclaims all liability for the use, in whole or in part, of this Technical Guide in preparation of project specifications and/or other documents. Technical Guides are subject to change at any time, without notice, and at Wausau's sole discretion. ©2014 Apogee Wausau Group, Inc.