


Curtainwall and Window Wall

HP-WALL Series HIGH PERFORMANCE

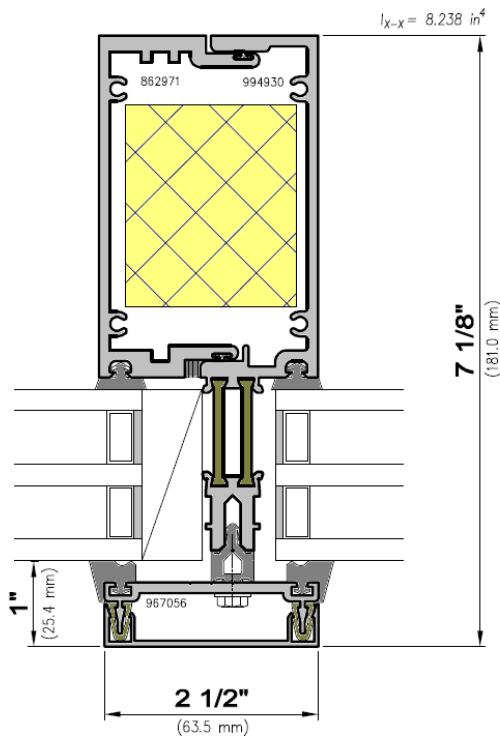

Features

- ✓ Best-in-class thermal performance lowers operating costs and reduces necessary HVAC capacity
- ✓ Condensation resistance for high humidity occupancies
- ✓ 2 ½" exterior sight line
- ✓ Accepts triple insulating glass
- ✓ Proven pressure-plate field glazing system design
- ✓ Multi-level thermal barrier
- ✓ Captured or vertical structural glazed
- ✓ Screw-spline construction
- ✓ Available with interior access doors and between-glass blinds
- ✓ Exterior sun shades and interior light shelves available
- ✓ NFRC and Component Modeling Approach (CMA) listed
- ✓ High recycled content aluminum framing

Performance

Allowable Air
0.06 cfm/sqft at 6.24 psf
Water
15 psf
NFRC U-Factor
0.18 to 0.52 BTU/hr.sqft.°F
CRF_f
78 to 83
STC
31 to 49 (est)



DISCLAIMER: Wausau Window and Wall Systems takes no responsibility for product selection or application, including, but not limited to, compliance with building codes, safety codes, laws, merchantability or fitness for a particular purpose; and further disclaims all liability for the use, in whole or in part, of this Technical Guide in preparation of project specifications and/or other documents. Technical Guides are subject to change at any time, without notice, and at Wausau's sole discretion. ©2014 Apogee Wausau Group, Inc.