


HX32-XLT Single Hung and FX32-XLT Fixed Series

Elevations Viewed From The Exterior

Section Contents	Page(s)
Details	H5-2 and H5-3
Posts & Mullions	H5-4 and H5-5
Glazing Options	H5-6
Accessories	H5-7 and H5-8



AAMA Test Configurations (shown)

Architectural AW Class
For air, water, cycling and structural


Fixed Frame Size 59" x 98" Fixed 1500 mm x 2500 mm Vertical Slider Size 59" x 98" Type A 1500 mm x 2500 mm




NFRC 100 Thermal Test Configurations (shown)

For U-Factor, SHGC and CR

Fixed Frame Size 47" x 59" 1200 mm x 1500 mm Vertical Slider Size 47" x 59" 1200 mm x 1500 mm

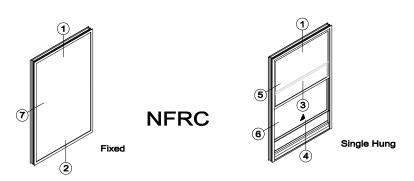






HX32-XLT Series


Developed and tested as EFCO XTherm™ HX-32 Series


Contact A Wausau Representative For Other Possible Configurations

























HX32-XLT Single Hung and FX32-XLT Fixed Series

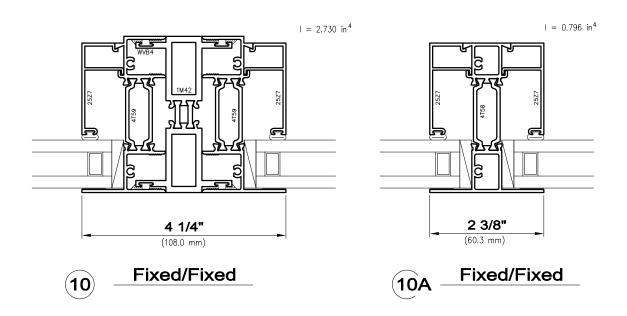


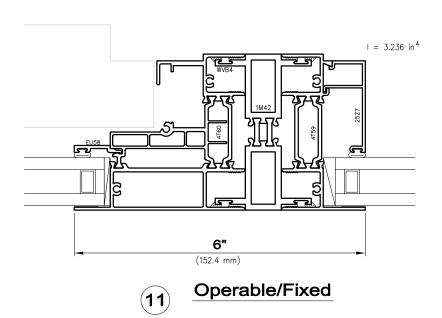

I-values indicated are for frame members only. Thermal barrier shear reduction of 10% included.

HX32-XLT Single Hung and FX32-XLT Fixed Series

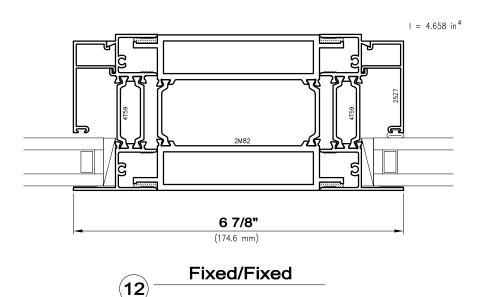


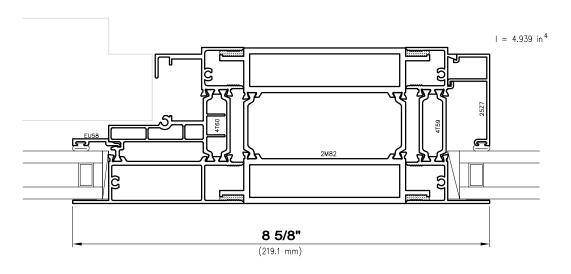



Operable/Fixed


I-values indicated are for frame members only. Thermal barrier shear reduction of 10% included.




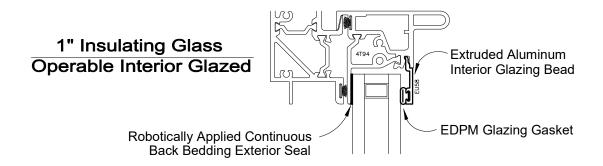

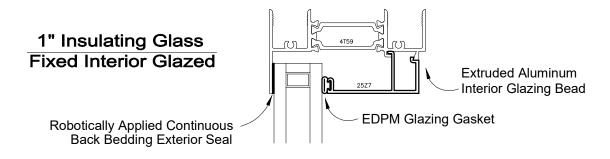

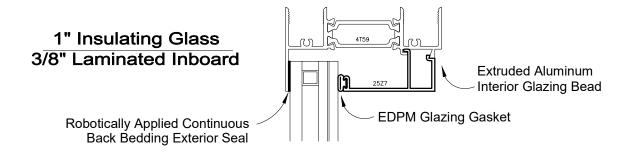

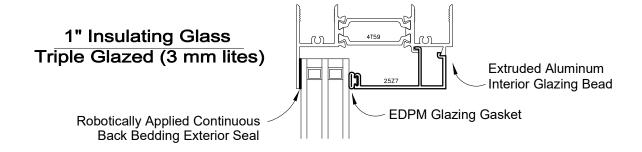




4558 EN12 WA04

3-1/4" Head Starter

3-1/4" Jamb Starter



3-1/4" Sill Starter

