

TD-4250i Series

Elevations Viewed From The Exterior

Section Contents Page(s)

Details D1-2 thru D1-7

Glazing Options D1-8
Blind Options D1-9
Accessories D1-10
Improved Access Sills D1-11


AAMA Test Configurations (shown)

Architectural AW Class

For alr, water, cycling and structural

Fixed Frame Size


Gateway Size 48" x 96" casement 1.

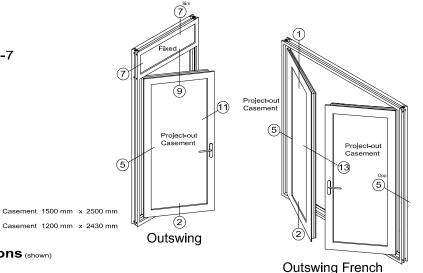

NFRC 100 Thermal Test Configurations (shown)

60" x 99"

For U-Factor, SHGC and CR

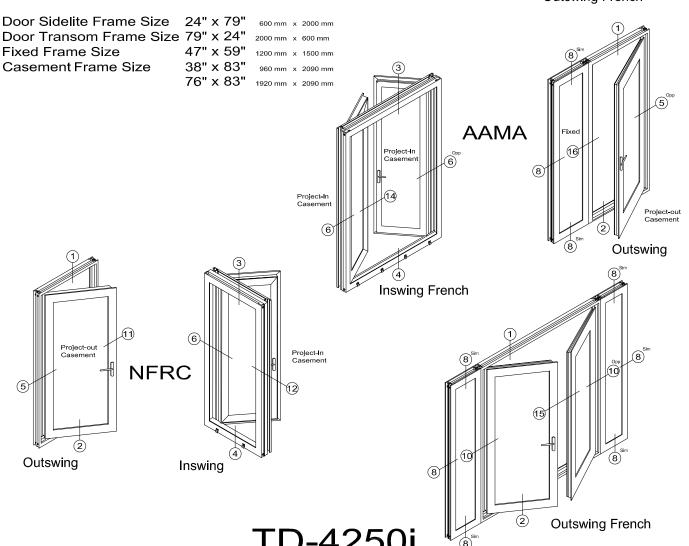


Contact A Wausau Representative For Other Possible Configurations.



TD-4250i Series


Non-stocked items shown — Minimum order quantity may apply

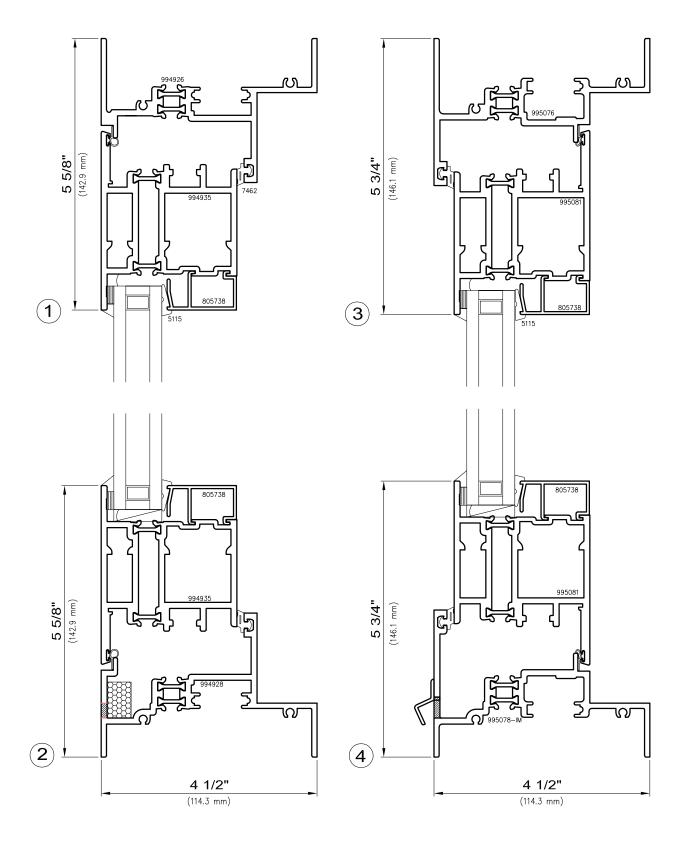






TD-4250i Series

Non-stocked items shown — Minimum order quantity may apply

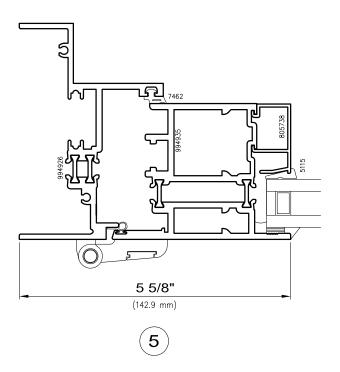

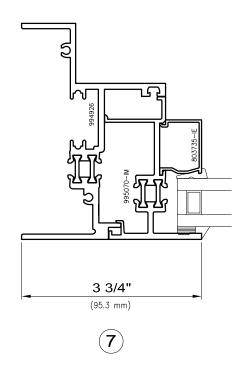


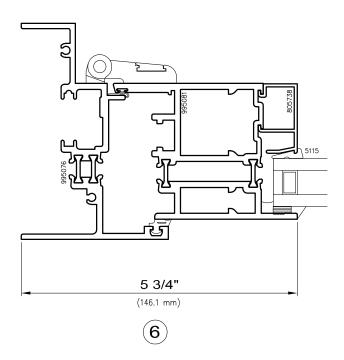


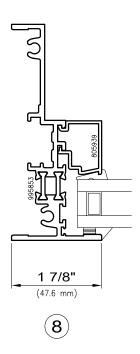

TD-4250i Series

Non-stocked items shown — Minimum order quantity may apply

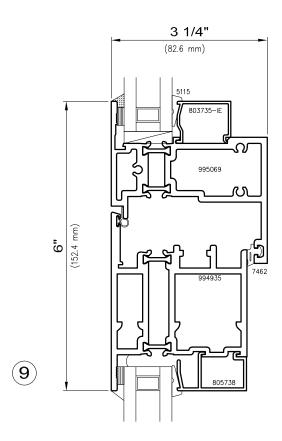


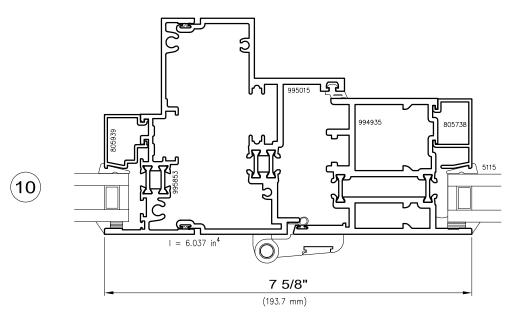

I-values indicated are for frame members only. Thermal barrier shear reduction of 15% included.




TD-4250i Series

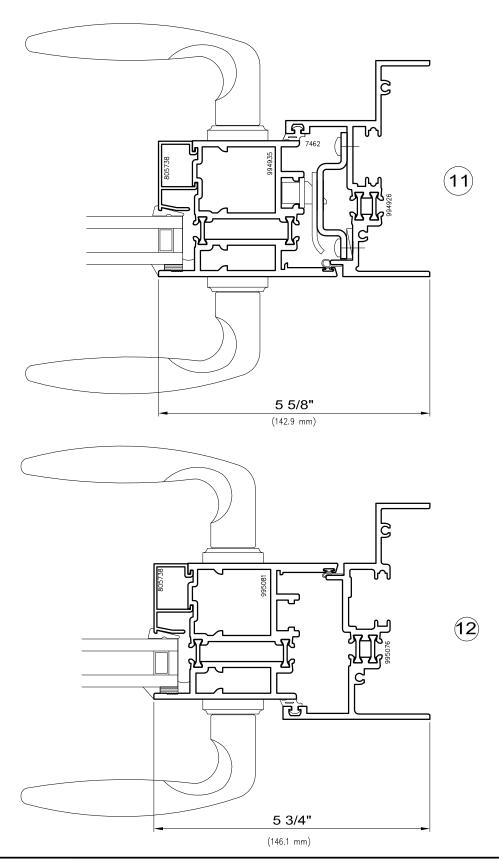




TD-4250i Series

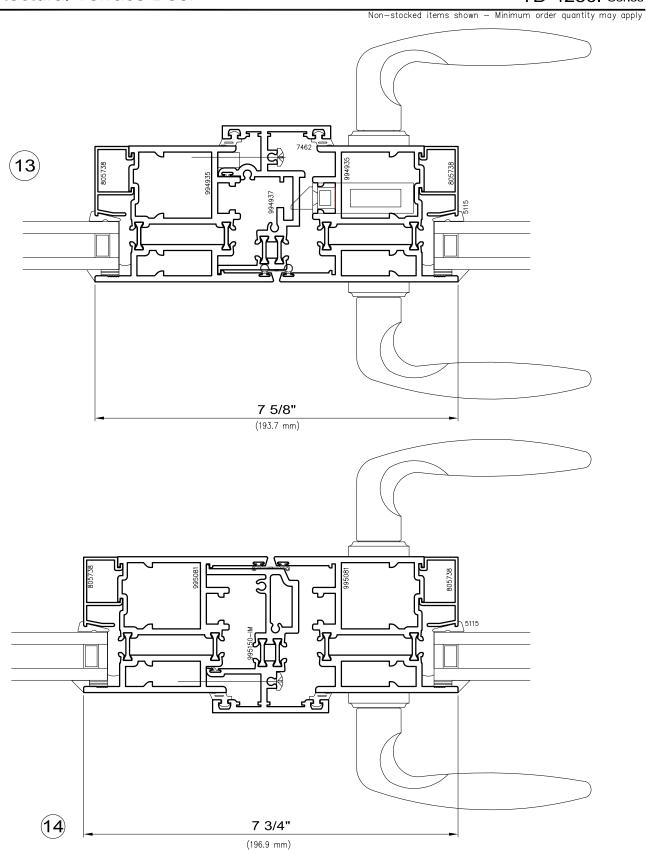



TD-4250i Series

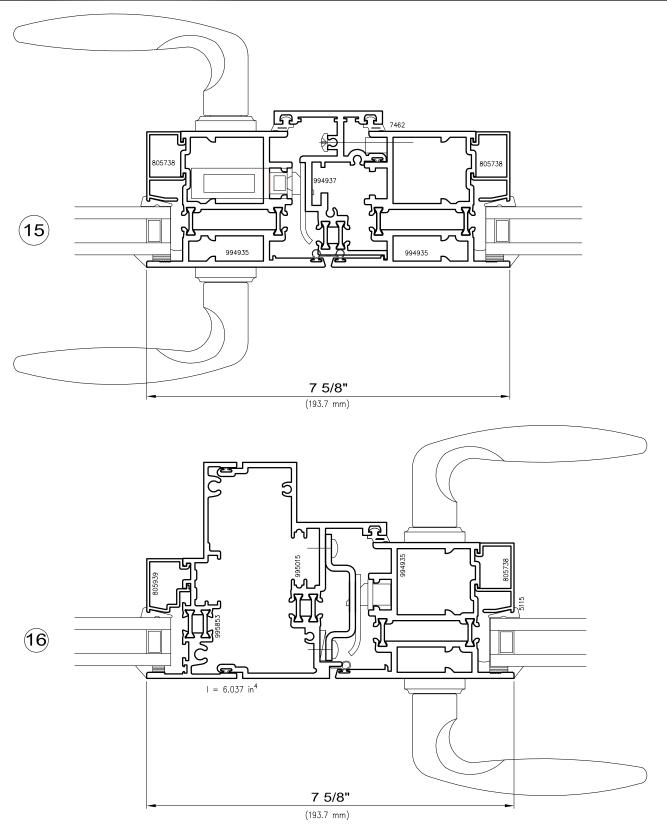


I-values indicated are for frame members only. Thermal barrier shear reduction of 15% included.




TD-4250i Series

Non-stocked items shown — Minimum order quantity may apply

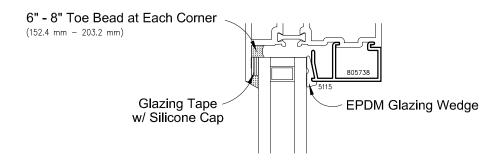

1" Insulating Glass
Operable Inside Glazed

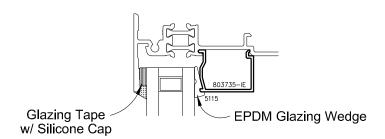


1" Insulating Glass Fixed Inside Glazed





TD-4250i Series

Elevations Shown As Viewed From The Interior




Lift-Out






1" Blind/Dual Glazed




5/8" Blind/Dual Glazed




5/8" Blind/Triple Glazed


TD-4250i Series



PVC Caulk Backer



Slide-In Anchor 3/16" Formed Steel




Automatic Door Closure
ADA Options Available



TD-4250i Series

Non-stocked items shown — Minimum order quantity may apply

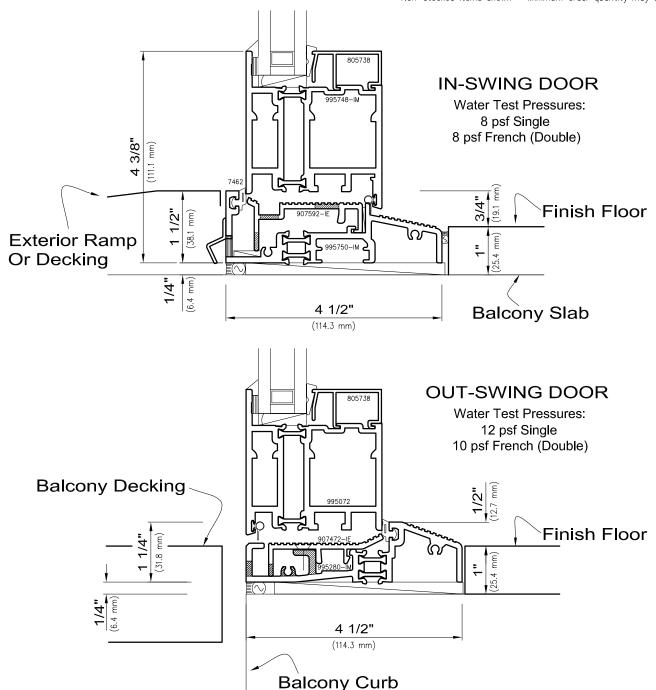

NOTE: With careful installation and proper gasket compression adjustments, new terrace doors with improved access sills will perform dependably as noted. Balcony settling, normal use and wear over time may affect air and water performance of doors fitted with improved access sills.

DISCLAIMER: With properly designed building conditions and correct installation, TD-4250i improved access sill component profiles will meet ADA accessibility criteria per Fair Housing Act Regulations, 24 CFR 100.205 Chapter 4, "Thresholds and Accessibility Routes at Exterior Doors". However, Wausau Window and Wall Systems makes no claim relative to ADA or Fair Housing Act compliance, or lack thereof, applicable to the total terrace door installation, including but not limited to, hardware, approach area, reach, force(s), motion, etc. It is the sole responsibility of the building's Architect or Engineer of Record to verify compliance of the total installation.

Wausau takes no responsibility for compliance, or for acceptance by authorities having jurisdiction.