
TECHNICAL GUIDE

CASEMENT and FIXED

3250-HP Series HURRICANE

Architectural Windows

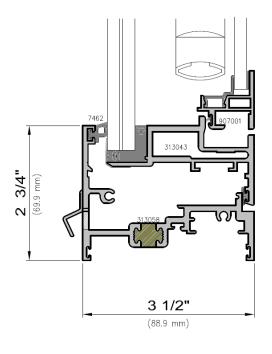

Miami Dade Product Control Approved:

Fixed window, large missile Notice of Acceptance (NOA) #12-0416.07 Miami-Dade County, Florida, 25Apr17

Fixed window, small missile Notice of Acceptance (NOA) #12-0416.09 Miami-Dade County, Florida, 25Apr17

Casement window, large missile Notice of Acceptance (NOA) #12-04016.06 Miami-Dade County, Florida, 25Apr17

Casement window, small missile Notice of Acceptance (NOA) #12-04016.08 Miami-Dade County, Florida, 25Apr17



Features Performance

- √ 3½" frame depth with polyurethane thermal barrier
- ✓ AAMA AW-120 Performance Class
- Tested for small and large missile impact followed by cyclical pressure structural loading
- ✓ Fixed or project-in casement only
- ✓ Equal sight lines at vents and fixed lites
- √ Ideal for hospital applications
- ✓ Multi-lock hardware for improved accessibility
- ✓ Structural "no-sag" glazing allows for large vents
- √ 1/8" principal wall thickness
- ✓ No vent joinery exposed to the exterior
- ✓ Dual glazed option with hinged access panels
- ✓ 5/8" or 1" between-glass Venetian blinds available
- ✓ Offered through Advantage by Wausau
- ✓ Recycled aluminum framing available upon request



Allowable Air
0.10 cfm/sqft at 6.24 psf
Water
15 psf
NFRC U- Factor
0.41 to 1.10 BTU/hr.sqft.°F (est)
CRF _f
56 to 62 (est)
STC
34 to 47 (est)

DISCLAIMER: Wausau Window and Wall Systems takes no responsibility for product selection or application, including, but not limited to, compliance with building codes, safety codes, laws, merchantability or fitness for a particular purpose; and further disclaims all liability for the use, in whole or in part, of this Technical Guide in preparation of project specifications and/or other documents. Technical Guides are subject to change at any time, without notice, and at Wausau's sole discretion. ©2014 Wausau